




Project*

First Saved	Friday, May 31, 2024
Last Saved	Friday, May 31, 2024
Product Version	2024 R1
Save Project Before Solution	No
Save Project After Solution	No

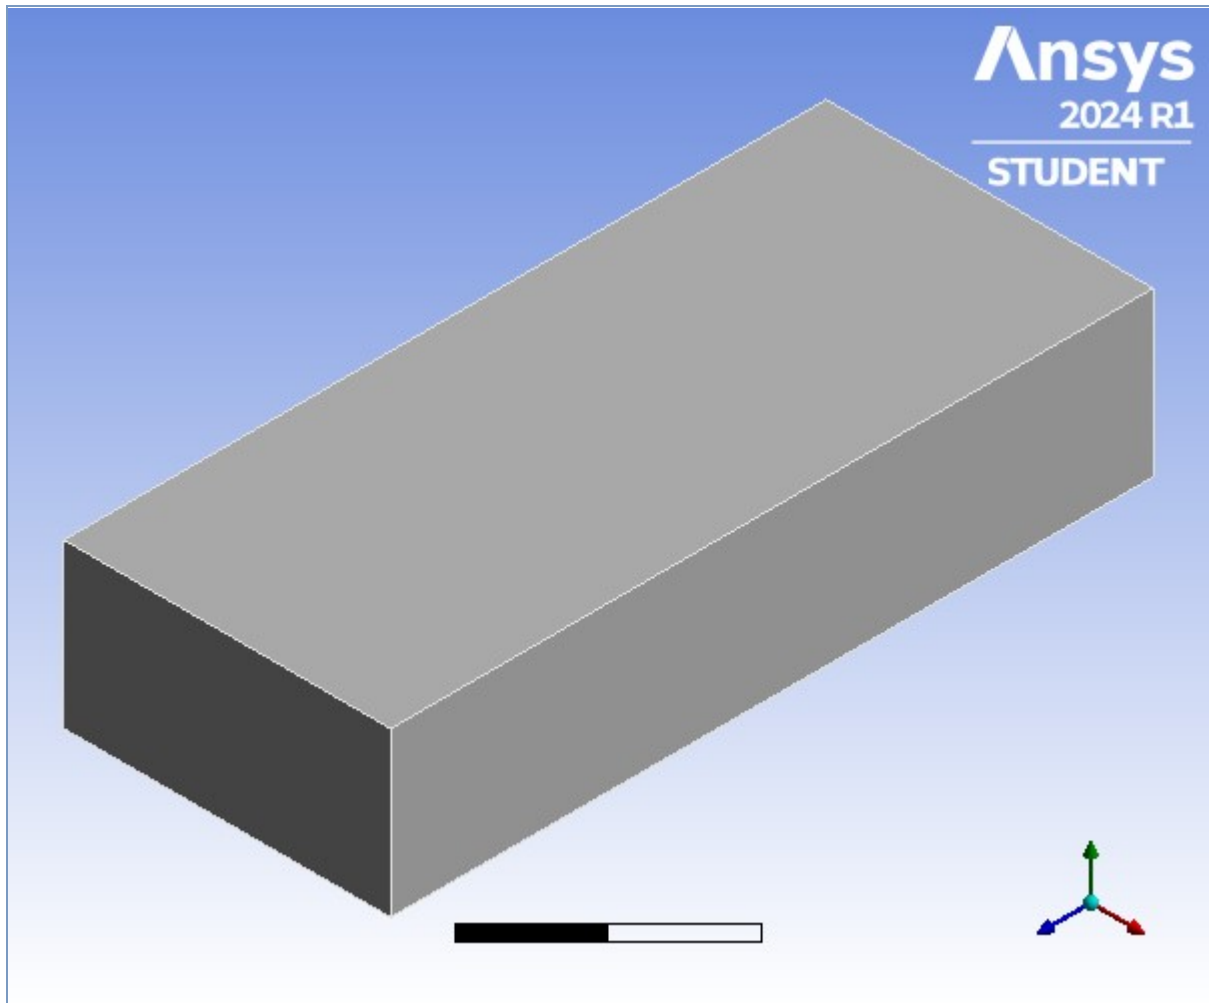

Contents

- [Units](#)
- [Model \(A4\)](#)
 - [Geometry Imports](#)
 - [Geometry Import \(A3\)](#)
 - [Geometry](#)
 - [Solid](#)
 - [Materials](#)
 - [Coordinate Systems](#)
 - [Mesh](#)
 - [Static Structural \(A5\)](#)
 - [Analysis Settings](#)
 - [Loads](#)
 - [Solution \(A6\)](#)
 - [Solution Information](#)
 - [Results](#)
- [Material Data](#)
 - [Structural Steel](#)

Units

TABLE 1

Unit System	Metric (m, kg, N, s, V, A) Degrees rad/s Celsius
Angle	Degrees
Rotational Velocity	rad/s
Temperature	Celsius

Model (A4)

TABLE 2

Model (A4) > Geometry Imports

Object Name	<i>Geometry Imports</i>
State	Solved

TABLE 3

Model (A4) > Geometry Imports > Geometry Import (A3)

Object Name	<i>Geometry Import (A3)</i>
State	Solved
Definition	
Source	C:\Users\User\AppData\Local\Temp\WB_User_6904_2\wbnew_files\dp0\SYS\DM\SYS.agdb
Type	DesignModeler
Basic Geometry Options	
Parameters	Independent
Parameter Key	
Advanced Geometry Options	
Compare Parts On Update	No
Analysis Type	3-D

Geometry

TABLE 4
Model (A4) > Geometry

Object Name	<i>Geometry</i>
State	Fully Defined
Definition	
Source	C:\Users\User\AppData\Local\Temp\WB_User_6904_2\wbnew_files\dp0 \SYS\DM\SYS.agdb
Type	DesignModeler
Length Unit	Meters
Element Control	Program Controlled
Display Style	Body Color
Bounding Box	
Length X	3, m
Length Y	1,5 m
Length Z	7, m
Properties	
Volume	31,5 m ³
Mass	2,4728e+005 kg
Scale Factor Value	1,
Statistics	
Bodies	1
Active Bodies	1
Nodes	3275
Elements	608
Mesh Metric	None
Update Options	
Assign Default Material	No
Basic Geometry Options	
Parameters	Independent
Parameter Key	
Attributes	Yes
Attribute Key	
Named Selections	Yes
Named Selection Key	
Material Properties	Yes
Advanced Geometry Options	
Use Associativity	Yes
Coordinate Systems	Yes
Coordinate System Key	
Reader Mode Saves Updated File	No
Use Instances	Yes
Smart CAD Update	Yes
Compare Parts On Update	No
Analysis Type	3-D
Import Facet Quality	Source
Clean Bodies On Import	No
Stitch Surfaces On Import	None
Decompose Disjoint Geometry	Yes
Enclosure and Symmetry Processing	Yes

TABLE 5
Model (A4) > Geometry > Parts

Object Name	<i>Solid</i>
State	Meshed

Graphics Properties	
Visible	Yes
Transparency	1
Definition	
Suppressed	No
Stiffness Behavior	Flexible
Coordinate System	Default Coordinate System
Reference Temperature	By Environment
Treatment	None
Material	
Assignment	Structural Steel
Nonlinear Effects	Yes
Thermal Strain Effects	Yes
Bounding Box	
Length X	3, m
Length Y	1,5 m
Length Z	7, m
Properties	
Volume	31,5 m ³
Mass	2,4728e+005 kg
Centroid X	1,5 m
Centroid Y	0,75 m
Centroid Z	3,5 m
Moment of Inertia Ip1	1,0561e+006 kg·m ²
Moment of Inertia Ip2	1,1952e+006 kg·m ²
Moment of Inertia Ip3	2,3182e+005 kg·m ²
Statistics	
Nodes	3275
Elements	608
Mesh Metric	None

TABLE 6
Model (A4) > Materials

Object Name	<i>Materials</i>
State	Fully Defined
Statistics	
Materials	1
Material Assignments	0

Coordinate Systems

TABLE 7
Model (A4) > Coordinate Systems > Coordinate System

Object Name	<i>Global Coordinate System</i>
State	Fully Defined
Definition	
Type	Cartesian
Coordinate System ID	0,
Origin	
Origin X	0, m
Origin Y	0, m
Origin Z	0, m
Directional Vectors	
X Axis Data	[1, 0, 0,]
Y Axis Data	[0, 1, 0,]
Z Axis Data	[0, 0, 1,]

Transfer Properties	
Source	
Read Only	No

Mesh

TABLE 8
Model (A4) > Mesh

Object Name	<i>Mesh</i>
State	Solved
Display	
Display Style	Use Geometry Setting
Defaults	
Physics Preference	Mechanical
Element Order	Program Controlled
Element Size	Default
Sizing	
Use Adaptive Sizing	Yes
Resolution	Default (2)
Mesh Defeaturing	Yes
Defeature Size	Default
Transition	Fast
Span Angle Center	Coarse
Initial Size Seed	Assembly
Bounding Box Diagonal	7,7621 m
Average Surface Area	12, m ²
Minimum Edge Length	1,5 m
Quality	
Check Mesh Quality	Yes, Errors
Error Limits	Aggressive Mechanical
Target Element Quality	Default (5,e-002)
Smoothing	Medium
Mesh Metric	None
Inflation	
Use Automatic Inflation	None
Inflation Option	Smooth Transition
Transition Ratio	0,272
Maximum Layers	5
Growth Rate	1,2
Inflation Algorithm	Pre
Inflation Element Type	Wedges
View Advanced Options	No
Advanced	
Number of CPUs for Parallel Part Meshing	Program Controlled
Straight Sided Elements	No
Rigid Body Behavior	Dimensionally Reduced
Triangle Surface Mesher	Program Controlled
Topology Checking	Yes
Pinch Tolerance	Please Define
Generate Pinch on Refresh	No
Statistics	
Nodes	3275
Elements	608
Show Detailed Statistics	No

Static Structural (A5)

TABLE 9
Model (A4) > Analysis

Object Name	Static Structural (A5)
State	Solved
Definition	
Physics Type	Structural
Analysis Type	Static Structural
Solver Target	Mechanical APDL
Options	
Environment Temperature	22, °C
Generate Input Only	No

TABLE 10
Model (A4) > Static Structural (A5) > Analysis Settings


Object Name	Analysis Settings
State	Fully Defined
Step Controls	
Number Of Steps	1,
Current Step Number	1,
Step End Time	1, s
Auto Time Stepping	Program Controlled
Solver Controls	
Solver Type	Program Controlled
Weak Springs	Off
Solver Pivot Checking	Program Controlled
Large Deflection	Off
Inertia Relief	Off
Quasi-Static Solution	Off
Rotordynamics Controls	
Coriolis Effect	Off
Restart Controls	
Generate Restart Points	Program Controlled
Retain Files After Full Solve	No
Combine Restart Files	Program Controlled
Nonlinear Controls	
Newton-Raphson Option	Program Controlled
Force Convergence	Program Controlled
Moment Convergence	Program Controlled
Displacement Convergence	Program Controlled
Rotation Convergence	Program Controlled
Line Search	Program Controlled
Stabilization	Program Controlled
Advanced	
Inverse Option	No
Contact Split (DMP)	Program Controlled
Output Controls	
Stress	Yes
Back Stress	No
Strain	Yes
Contact Data	Yes
Nonlinear Data	No
Nodal Forces	No

Volume and Energy	Yes
Euler Angles	Yes
General Miscellaneous	No
Contact Miscellaneous	No
Store Results At	All Time Points
Result File Compression	Program Controlled
Analysis Data Management	
Solver Files Directory	C:\Users\User\AppData\Local\Temp\WB_User_6904_2\wbnew_files\dp0\SYS\MECH\
Future Analysis	None
Scratch Solver Files Directory	
Save MAPDL db	No
Contact Summary	Program Controlled
Delete Unneeded Files	Yes
Nonlinear Solution	No
Solver Units	Active System
Solver Unit System	mks

TABLE 11
Model (A4) > Static Structural (A5) > Loads

Object Name	<i>Fixed Support</i>	<i>Force</i>
State	Fully Defined	
Scope		
Scoping Method	Geometry Selection	
Geometry	1 Face	1 Edge
Definition		
Type	Fixed Support	Force
Suppressed	No	
Define By		Components
Applied By		Surface Effect
Coordinate System		Global Coordinate System
X Component		0, N (ramped)
Y Component		-5000, N (ramped)
Z Component		0, N (ramped)

FIGURE 1
Model (A4) > Static Structural (A5) > Force

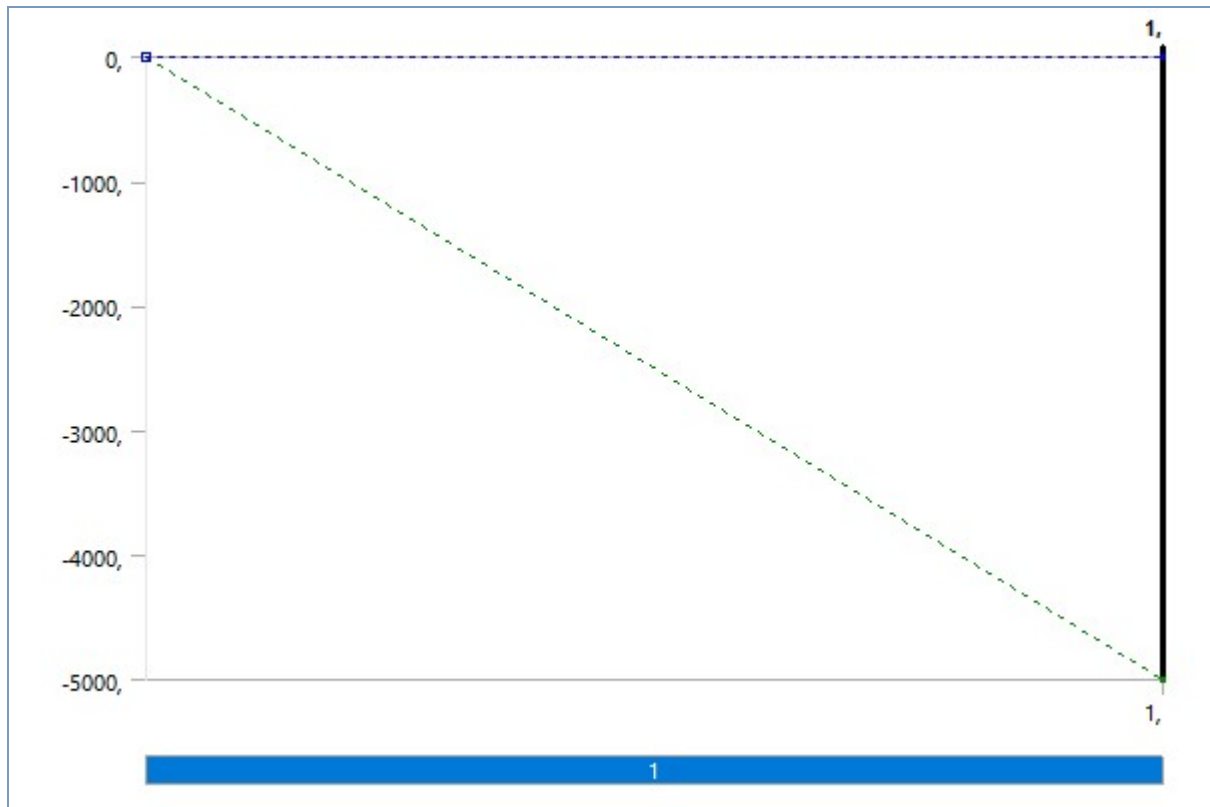

Solution (A6)

TABLE 12
Model (A4) > Static Structural (A5) > Solution

Object Name	<i>Solution (A6)</i>
State	Solved
Adaptive Mesh Refinement	
Max Refinement Loops	1,
Refinement Depth	2,
Information	
Status	Done
MAPDL Elapsed Time	3, s
MAPDL Memory Used	182, MB
MAPDL Result File Size	1, MB
Post Processing	
Beam Section Results	No
On Demand Stress/Strain	No

TABLE 13
Model (A4) > Static Structural (A5) > Solution (A6) > Solution Information

Object Name	<i>Solution Information</i>
State	Solved
Solution Information	
Solution Output	Solver Output
Newton-Raphson Residuals	0
Identify Element Violations	0
Update Interval	2,5 s
Display Points	All
FE Connection Visibility	
Activate Visibility	Yes
Display	All FE Connectors
Draw Connections Attached To	All Nodes

Line Color	Connection Type
Visible on Results	No
Line Thickness	Single
Display Type	Lines

TABLE 14
Model (A4) > Static Structural (A5) > Solution (A6) > Results

Object Name	Total Deformation	Elastic Strain Intensity	Stress Intensity
State	Solved		
Scope			
Scoping Method	Geometry Selection		
Geometry	All Bodies	1 Edge	
Definition			
Type	Total Deformation	Elastic Strain Intensity	Stress Intensity
By	Time		
Display Time	Last		
Separate Data by Entity	No		
Calculate Time History	Yes		
Identifier			
Suppressed	No		
Results			
Minimum	0, m	2,7727e-008 m/m	4265,6 Pa
Maximum	3,5046e-006 m	2,2669e-007 m/m	34876 Pa
Average	1,329e-006 m	1,0831e-007 m/m	16663 Pa
Minimum Occurs On	Solid		
Maximum Occurs On	Solid		
Information			
Time	1, s		
Load Step	1		
Substep	1		
Iteration Number	1		
Integration Point Results			
Display Option	Averaged		
Average Across Bodies	No		

FIGURE 2
Model (A4) > Static Structural (A5) > Solution (A6) > Total Deformation

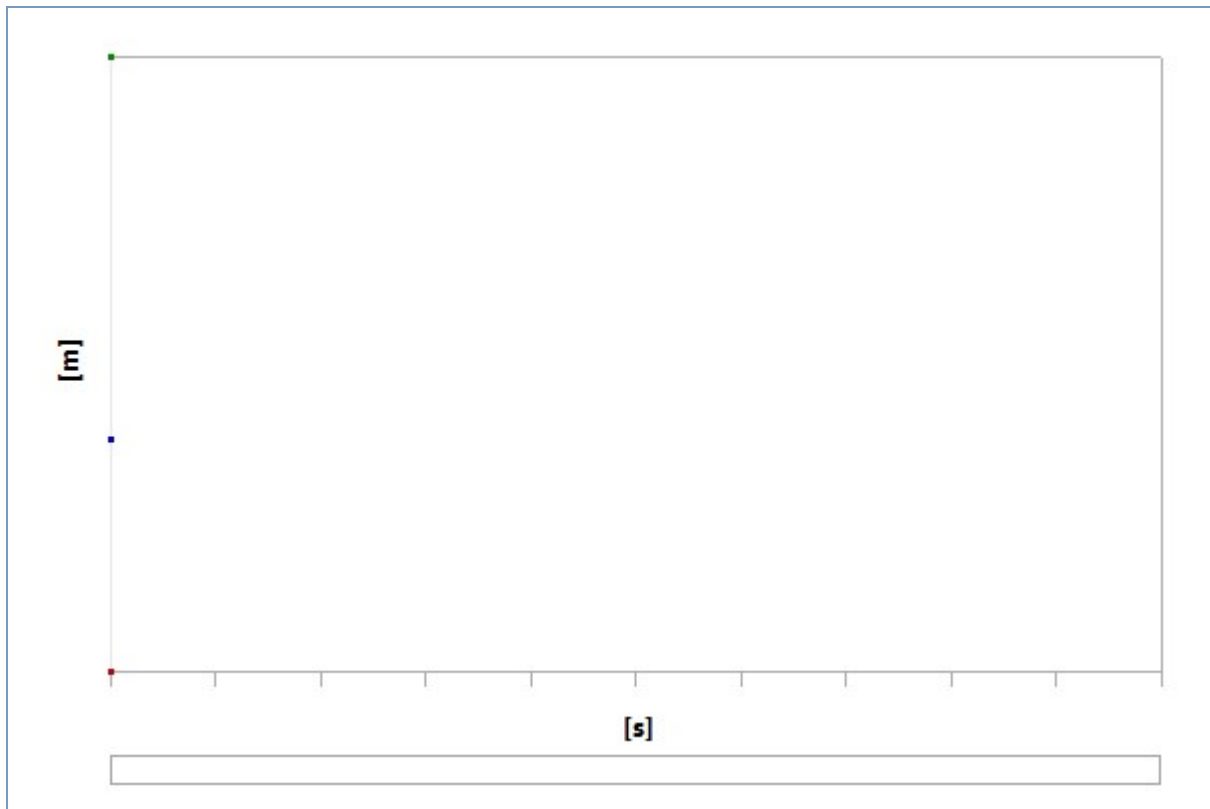


TABLE 15
Model (A4) > Static Structural (A5) > Solution (A6) > Total Deformation

Time [s]	Minimum [m]	Maximum [m]	Average [m]
1,	0,	3,5046e-006	1,329e-006

FIGURE 3
Model (A4) > Static Structural (A5) > Solution (A6) > Elastic Strain Intensity

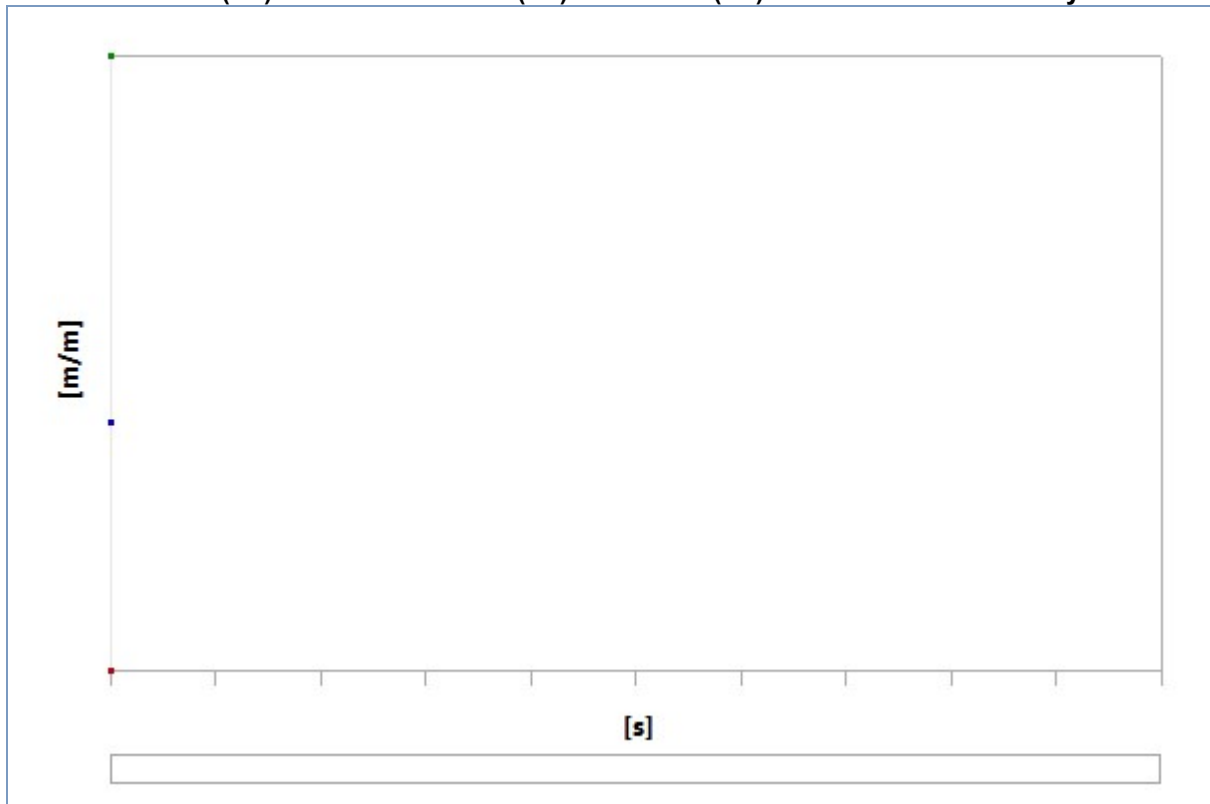
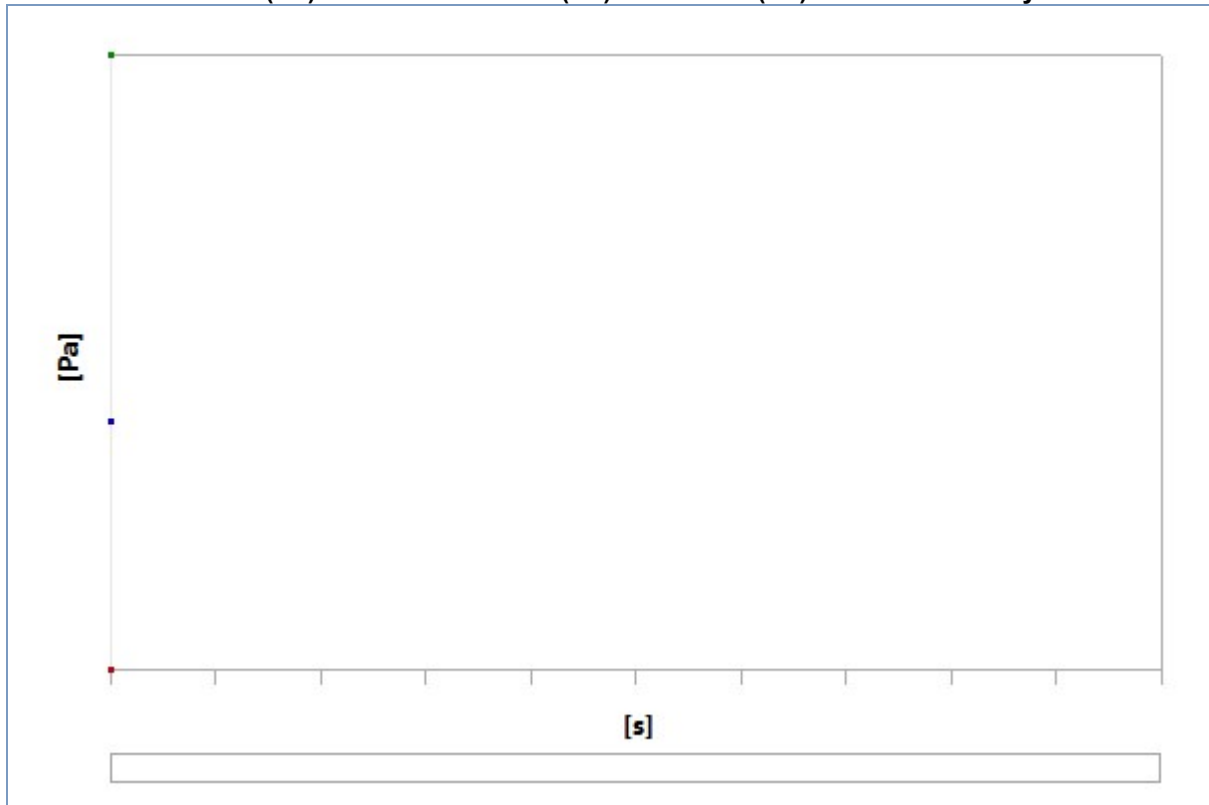


TABLE 16

Model (A4) > Static Structural (A5) > Solution (A6) > Elastic Strain Intensity

Time [s]	Minimum [m/m]	Maximum [m/m]	Average [m/m]
1,	2,7727e-008	2,2669e-007	1,0831e-007

FIGURE 4**Model (A4) > Static Structural (A5) > Solution (A6) > Stress Intensity****TABLE 17****Model (A4) > Static Structural (A5) > Solution (A6) > Stress Intensity**

Time [s]	Minimum [Pa]	Maximum [Pa]	Average [Pa]
1,	4265,6	34876	16663

Material Data

Structural Steel

TABLE 18**Structural Steel > Constants**

Density	7850, kg m ⁻³
Coefficient of Thermal Expansion	1,2e-005 C ⁻¹
Specific Heat	434, J kg ⁻¹ C ⁻¹
Thermal Conductivity	60,5 W m ⁻¹ C ⁻¹
Resistivity	1,7e-007 ohm m

TABLE 19**Structural Steel > Color**

Red	Green	Blue
132,	139,	179,

TABLE 20**Structural Steel > Compressive Ultimate Strength**

Compressive Ultimate Strength Pa
0,

TABLE 21
Structural Steel > Compressive Yield Strength

Compressive Yield Strength Pa
2,5e+008

TABLE 22
Structural Steel > Tensile Yield Strength

Tensile Yield Strength Pa
2,5e+008

TABLE 23
Structural Steel > Tensile Ultimate Strength

Tensile Ultimate Strength Pa
4,6e+008

TABLE 24
Structural Steel > Isotropic Secant Coefficient of Thermal Expansion

Zero-Thermal-Strain Reference Temperature C
22,

TABLE 25
Structural Steel > S-N Curve

Alternating Stress Pa	Cycles	Mean Stress Pa
3,999e+009	10,	0,
2,827e+009	20,	0,
1,896e+009	50,	0,
1,413e+009	100,	0,
1,069e+009	200,	0,
4,41e+008	2000,	0,
2,62e+008	10000	0,
2,14e+008	20000	0,
1,38e+008	1,e+005	0,
1,14e+008	2,e+005	0,
8,62e+007	1,e+006	0,

TABLE 26
Structural Steel > Strain-Life Parameters

Strength Coefficient Pa	Strength Exponent	Ductility Coefficient	Ductility Exponent	Cyclic Strength Coefficient Pa	Cyclic Strain Hardening Exponent
9,2e+008	-0,106	0,213	-0,47	1,e+009	0,2

TABLE 27
Structural Steel > Isotropic Elasticity

Young's Modulus Pa	Poisson's Ratio	Bulk Modulus Pa	Shear Modulus Pa	Temperature C
2,e+011	0,3	1,6667e+011	7,6923e+010	

TABLE 28
Structural Steel > Isotropic Relative Permeability

Relative Permeability
10000